

TADANO CARGO CRANE

MODEL : **TM-ZE505LHRS**

CRANE SPECIFICATIONS

<u>CRANE CAPACITY</u>	3,130 kg at 3.6 m (4-part line)
<u>BOOM</u>	Five-sectioned, fully powered partly synchronized telescoping boom of heptagonal box construction Retracted length ----- 4.32 m Extended length -----15.69 m Extending speed ----- 11.37 m / 29.5 s Elevation ----- Elevated by a double-acting hydraulic cylinder Elevating speed ----- 1° to 78° / 12 s Boom point ----- 2 sheaves
<u>WINCH</u>	Hydraulic motor driven Spur gear speed reduction, provided with mechanical brake and cable follower Single line pull ----- 7.70 kN {785 kgf} Single line speed ----- 76 m/min (at 4th layer) Wire rope Diameter x length --- 8 mm x 93 m Breaking strength --- 43.1 kN {4.39 tf} Construction ----- 7 x 7 + 6 x WS(26) Hook block ----- 2 sheaves
<u>HOOK STOWING DEVICE</u>	Mechanically stowed beneath boom top portion

<u>SWING</u>	Hydraulic motor driven Worm gear speed reduction Continuous 360° full circle swing on ball bearing slew ring Automatic swing lock Swing speed ----- 2.5 min ⁻¹ {rpm}
<u>OUTRIGGERS</u>	Manually extended sliders and hydraulically extended jacks Integral with crane frame Power up and down Extension width ----- Min. 2,200 mm Mid. 3,000 mm Full 3,800 mm
<u>HYDRAULICS</u>	Hydraulic pump ----- Single gear pump Hydraulic motors ----- Axial piston type for winch Axial piston type for swing Control valves ----- Multiple control valves with integral safety Valve Oil tank capacity ----- approx. 48 L
<u>RADIO CONTROLLER</u>	Model : RCS-F Control functions of boom telescoping, hoisting up and down, boom elevating, swing, acceleration, speed mode selection, working height limiting, Hook-in, Hook-out, horn and emergency stop Frequency ----- 40 frequencies in 433 MHz band Operating power supply Transmitter ----- 6V DC, Dry battery R6P(SUM-3) x 4 Control unit ----- 24V DC, Vehicle battery Transmitter mass ---- Approx. 576 g (includes batteries)
<u>SAFETY DEVICES</u>	AML(Automatic Moment Limiter) Load indication Load moment ratio to rated load indication Warning alarm Over load limiter WHL(Working Height Limiter) Load meter Radius indicator Emergency stop switch on radio controller Terminal for emergency stop switch Over-winding alarm Hoisting limiter Jack interlock P.T.O indicator lamp Hook safety latch Hydraulic safety valves, check valves and holding valves Level gauge
<u>CRANE MASS</u>	Approx. 2,130 kg (includes standardized mounting parts)

NOTE : Operating speeds of the crane are guaranteed under the condition that the pump delivery is 60 L/min.

RATED LIFTING CAPACITIES IN KILOGRAMS

Crane Strength Rated Capacities

Load Radius	4.32 m / 7.21 m / 10.04m Boom		Load Radius	12.87 m Boom	Load Radius	15.69 m Boom
	Extension width of outriggers			Extension width of outriggers		Extension width of outriggers
	Full	Minimum		Full		Full
3.0 m and below	3,130	2,630	4.0 m and below	1,980	5.0 m and below	530
3.6 m	3,130	1,880	4.5 m	1,930	6.0 m	530
3.9 m	2,930	1,630	5.0 m	1,830	7.0 m	530
4.5 m	2,480	1,280	6.0 m	1,580	8.0 m	530
5.0 m	2,180	1,080	7.0 m	1,330	9.0 m	530
5.5 m	1,930	880	8.0 m	1,130	10.0 m	530
6.0 m	1,730	750	9.0 m	950	11.0 m	530
6.5 m	1,530	650	10.0 m	850	12.0 m	530
7.0 m	1,380	530	11.0 m	780	13.0 m	530
8.0 m	1,180	430	12.0 m	700	14.0 m	530
9.0 m	980	300	12.65 m	650	15.47 m	530
9.82 m	880	230				

- NOTES : 1. The mass of hook block (30kg), slings and all similarly used load handling devices must be added to the mass of the load.
2. The above numerical values of total rated loads are based on crane strength only. The total rated loads based on stability may lower than those in the above table depending on the loading conditions and the types of the chassis.

Empty Chassis Rated Capacities

Table B

Load Radius	4.32 m / 7.21 m / 10.04m Boom		Load Radius	12.87 m Boom	Load Radius	15.69 m Boom
	Extension width of outriggers			Extension width of outriggers		Extension width of outriggers
	Full	Minimum		Full		Full
3.0 m and below	3,130	2,280	4.0 m and below	1,980	5.0 m and below	530
3.6 m	3,130	1,680	4.5 m	1,930	6.0 m	530
3.9 m	2,930	1,430	5.0 m	1,830	7.0 m	530
4.5 m	2,380	1,130	6.0 m	1,380	8.0 m	530
5.0 m	1,980	930	7.0 m	1,030	9.0 m	530
5.5 m	1,680	780	8.0 m	880	10.0 m	530
6.0 m	1,430	630	9.0 m	650	11.0 m	500
6.5 m	1,230	530	10.0 m	580	12.0 m	430
7.0 m	1,030	430	11.0 m	500	13.0 m	380
8.0 m	880	380	12.0 m	430	14.0 m	350
9.0 m	680	250	12.65 m	400	15.47 m	280
9.82 m	600	180				


Table C

Load Radius	4.32 m / 7.21 m / 10.04m Boom		Load Radius	12.87 m Boom	Load Radius	15.69 m Boom
	Extension width of outriggers			Extension width of outriggers		Extension width of outriggers
	Full	Minimum		Full		Full
3.0 m and below	3,130	2,630	4.0 m and below	1,980	5.0 m and below	530
3.6 m	3,130	1,880	4.5 m	1,930	6.0 m	530
3.9 m	2,930	1,630	5.0 m	1,830	7.0 m	530
4.5 m	2,480	1,280	6.0 m	1,580	8.0 m	530
5.0 m	2,180	1,080	7.0 m	1,330	9.0 m	530
5.5 m	1,930	880	8.0 m	1,080	10.0 m	530
6.0 m	1,730	750	9.0 m	830	11.0 m	530
6.5 m	1,530	650	10.0 m	730	12.0 m	530
7.0 m	1,330	530	11.0 m	650	13.0 m	500
8.0 m	1,080	430	12.0 m	580	14.0 m	450
9.0 m	880	300	12.65 m	530	15.47 m	380
9.82 m	750	230				


Table D

Load Radius	4.32 m / 7.21 m / 10.04m Boom		Load Radius	12.87 m Boom	Load Radius	15.69 m Boom
	Extension width of outriggers			Extension width of outriggers		Extension width of outriggers
	Full	Minimum		Full		Full
3.0 m and below	3,130	2,630	4.0 m and below	1,980	5.0 m and below	530
3.6 m	3,130	1,880	4.5 m	1,930	6.0 m	530
3.9 m	2,930	1,630	5.0 m	1,830	7.0 m	530
4.5 m	2,480	1,280	6.0 m	1,580	8.0 m	530
5.0 m	2,180	1,080	7.0 m	1,330	9.0 m	530
5.5 m	1,930	880	8.0 m	1,130	10.0 m	530
6.0 m	1,730	750	9.0 m	950	11.0 m	530
6.5 m	1,530	650	10.0 m	850	12.0 m	530
7.0 m	1,380	530	11.0 m	780	13.0 m	530
8.0 m	1,180	430	12.0 m	700	14.0 m	530
9.0 m	980	300	12.65 m	650	15.47 m	530
9.82 m	880	230				

- NOTES :
1. Empty Chassis Rated Capacities in these tables depend on condition that crane is set level on firm level ground.
 2. The mass of the hook (30 kg), slings and all similarly used load handling devices must be added to the mass of the load.
 3. For boom lengths not shown, use the rated lifting capacity of next longer boom.
 4. When outriggers are extended to middle extension width, use the rated lifting capacities for outriggers are extended to minimum extension width.
 5. For boom lengths longer than 10.04m, extend outriggers to maximum.
 6. 12.87m boom means \sphericalangle mark on 4th boom section side plate is half seen.
 7. Empty Chassis Rated Capacities table B, C and D depend on the types of chassis.
 8. Empty Chassis Rated Capacities are shown for over -side areas and over-rear area.
These capacities for over - front area may lowered depending on the types of chassis.

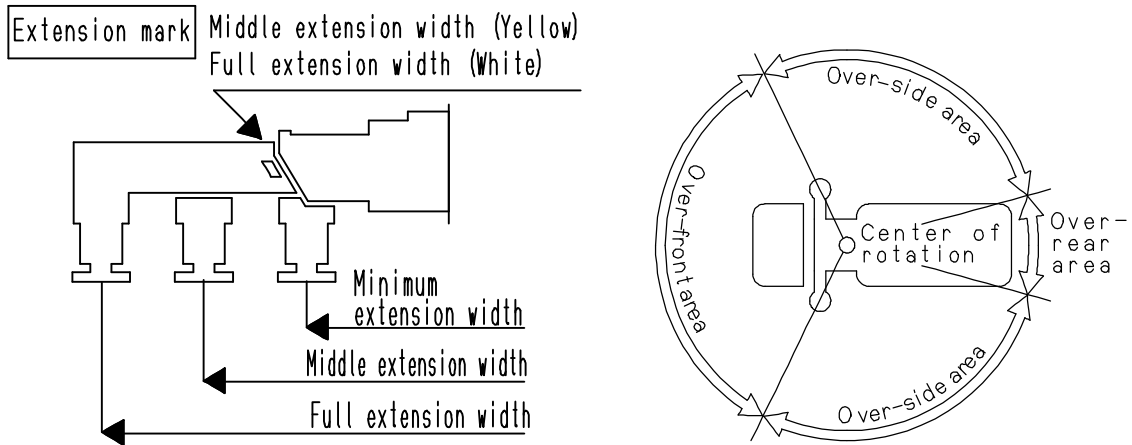


WORKING RANGE

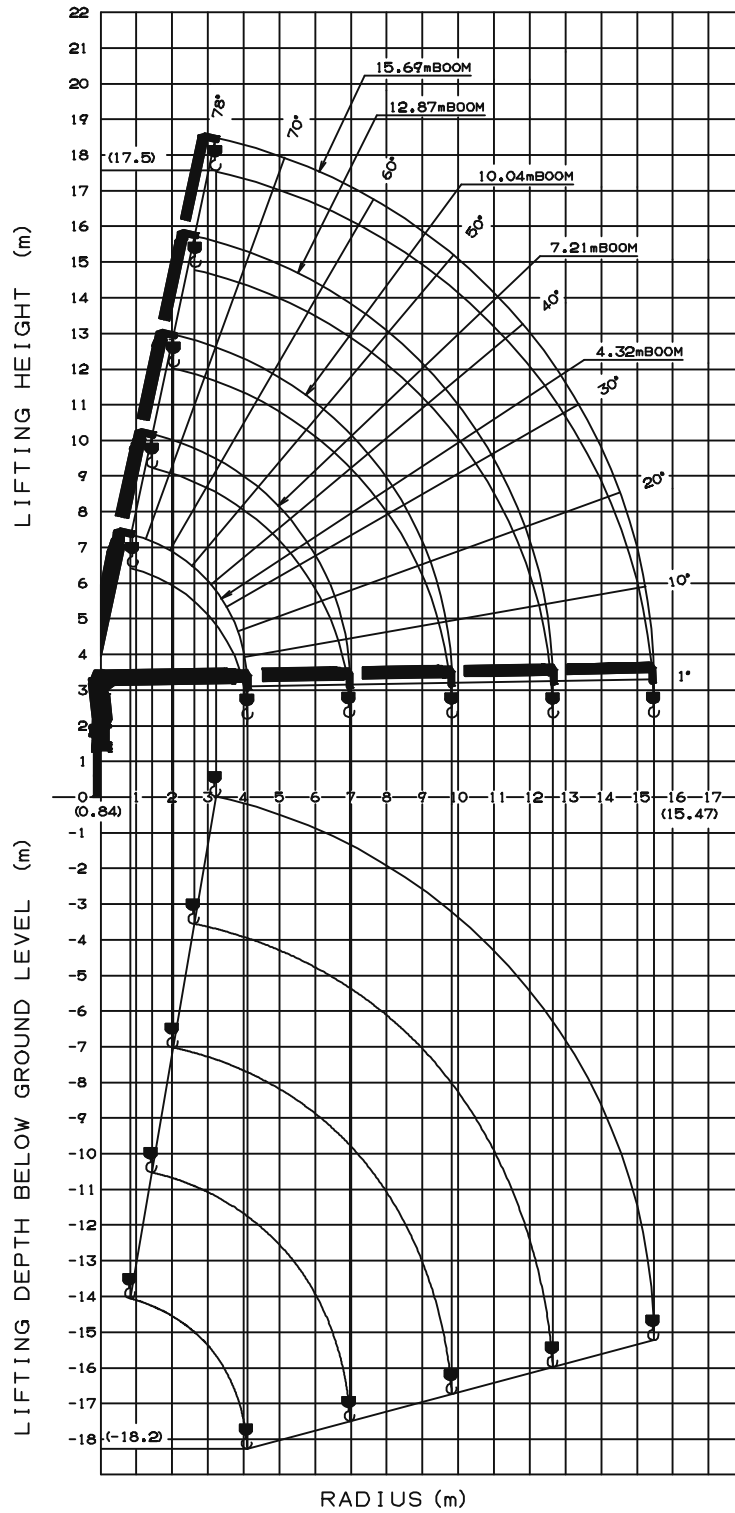

NOTE: The above lifting heights and boom angles are based on a straight (unladen) boom, and allowance should be made for boom deflection obtained under laden conditions.

DIMENSIONS
[TM-ZE505LHRS]

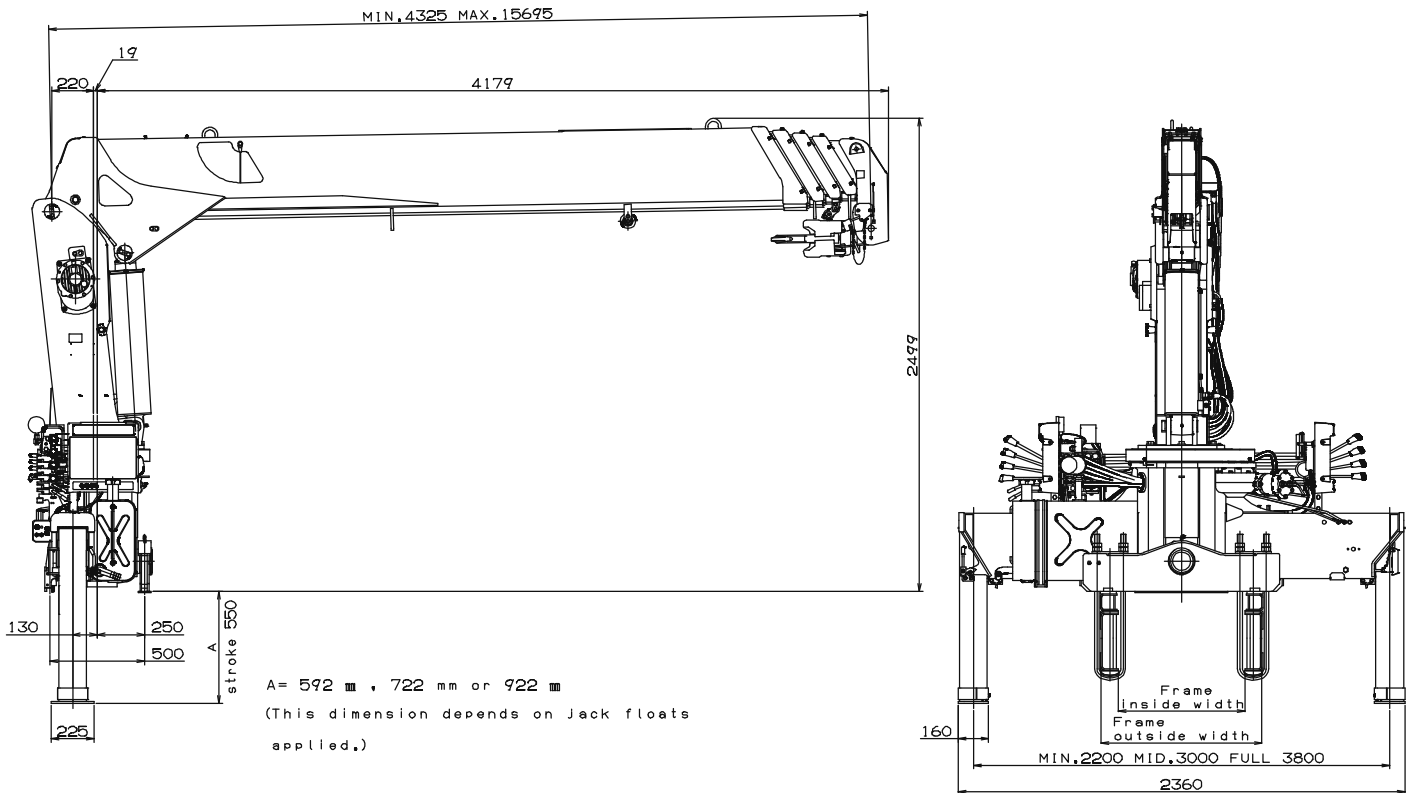

GENERAL DATA FOR SUITABLE TRUCKS

- Gross vehicle mass (including crane mass) ----- 12,000 to 25,000 kg
- P.T.O. torque ----- 157 N-m{16 kgf-m} min.
- P.T.O. revolution ----- Approx. 270 to 2,800 min⁻¹{rpm}
- Width for crane mounting ----- Approx. 750 mm min.
- Frame ----- Weight distribution and frame strength should be calculated for each truck
- Frame width range (inside to outside) ----- Approx. 610 to 960 mm
- Frame height (ground to frame top) ----- Approx. 1,235 mm max.
(Height of crane mounting base can be changed by combination of jack floats and crane bases)